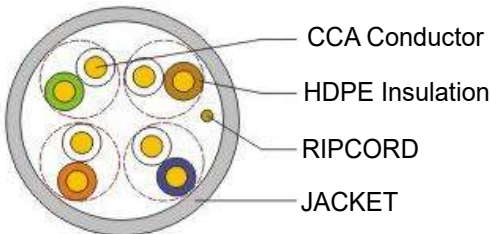


DATASHEET

Specifications

CONDUCTOR	Configuration	26AWG	CONFIGURATION
	Material	COPPER CLAD ALUMINUM	
	Work datapss	100 M	
INSULATION	Material	HDPE	
	PE OD	Φ0.91±0.05mm	
PAIRED PITCH	blue/blue&white	12mm	
	Orange /Orange &white	16mm	
	green/green&white	14mm	
	Brown/Brown&white	18mm	
OTHERS	RIPCORD	Nylon	
	GROUND	/	
	PACKAGE	305M/BOX	
SKIN	Material	PVC	Inside cable sequence: Blue/Blue&White, Orange /Orange &White, Green/Green&White, Brown/Brown&White.
	color	GRAY	
	PVC OD	5.0mm±0.2MM	
	PVC Thickness	0.51±0.03mm	
	SURFACE	SMOOTH	
PERFORMANCE	conductor resistanceΩ /100m.20℃	≤13 Ω	
	Conductor allow load current(A)	0.5A	
	voltage rating(V)	≤30V	
	operating temperature (℃)	—20℃~75	